

Absolute encoders - SSI

Shaft with clamping flange, stainless steel housing

Optical multiturn encoders 14 bit ST / 12 bit MT

GE404 - SSI



GE404 with clamping flange

Features

- Encoder multiturn / SSI
- Stainless steel design V4A
- Optical sensing
- Resolution: singleturn 14 bit, multiturn 12 bit
- Clamping flange
- Electronic setting of zero point
- Counting direction input
- High resistance to shock and vibrations
- Suitable for high positive, negative accelerations
- Available with additional incremental output
- Viton sealing resistant against chemical agents

Technical data - electrical ratings

Voltage supply	10...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤50 mA (24 VDC)
Initializing time (typ.)	20 ms after power on
Interface	SSI
Function	Multiturn
Steps per turn	≤16384 / 14 bit
Number of turns	4096 / 12 bit
Incremental output	2048 pulses A90°B (optional)
Absolute accuracy	±0.025 °
Sensing method	Optical
Code	Gray or binary
Code sequence	CW/CCW coded by connection
Inputs	SSI clock Control signals UP/DOWN and zero
Output circuit	SSI data: linedriver RS485 Diagnostic outputs push-pull
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Diagnostic functions	Self-diagnosis Code continuity check Multiturn sensing
Approval	UL approval / E63076

Technical data - mechanical design

Dimensions (flange)	ø58 mm
Shaft	ø10 mm
Flange	Clamping flange
Protection DIN EN 60529	IP 67
Operating speed	≤10000 rpm (mechanical) ≤6000 rpm (electric)
Starting torque	≤0.03 Nm
Rotor moment of inertia	20 gcm ²
Shaft loading	≤20 N axial ≤40 N radial
Materials	Housing: stainless steel 1.4435 or 1.4404 Flange: stainless steel 1.4435 or 1.4404
Operating temperature	-25...+85 °C -40...+85 °C (optional)
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 16-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	600 g
Connection	Connector M23, 12-pin

Absolute encoders - SSI

Shaft with clamping flange, stainless steel housing

Optical multiturn encoders 14 bit ST / 12 bit MT

GE404 - SSI

Part number

Clamping flange

GE404. **A**

Pulses / Incremental output

- 02 No incremental output
- 04 2048 pulses / push-pull
- 06 2048 pulses / RS422

Connection

- A1 Connector M23, 12-pin, radial
- A3 Connector M23, 12-pin, radial, for incremental output 04/06


Voltage supply / signals

- 10 10...30 VDC / gray code 25 bit
- 12 10...30 VDC / binary code 25 bit
- 20 10...30 VDC / gray code 24 bit
- 90 10...30 VDC / gray code 26 bit

Flange / Shaft

- A Clamping flange / ø10 mm IP 67

Data transfer

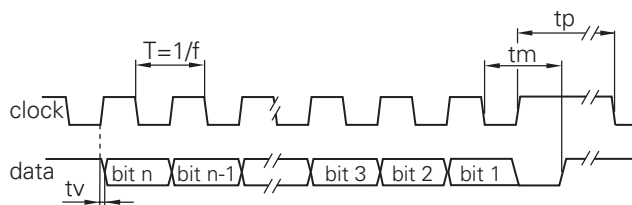

Clock frequency f 62.5...1500 kHz

Scan ratio of T 40...60 %

Time lag tv 150 ns

Monoflop time tm 25 µs + T/2

Clock interval tp 30 µs

Accessories

Connectors and cables

Z 189.001 Female connector M23, 12-pin, stainless steel, less cable

Z 189.007 Female connector M23, 12-pin, stainless steel, 10 m cable

Mounting accessories

Z 119.017 Mounting angle for clamping flange (M3)

Trigger level

SSI

Circuit

SSI-Clock

Optocoupler

SSI-Data

Linedriver RS485

Control inputs

Input circuit

Input level High >0.7 UB

Input level Low <0.3 UB

Input resistance 10 kΩ

Diagnostic outputs or Incremental outputs

Output circuit Push-pull circuit-proof

Output level High >UB -3.5 V (I = -20 mA)

Output level Low <0.5 V (I = 20 mA)

Load High / Low <20 mA

Incremental outputs

Linedriver RS422

Output level High >2.5 V (I = -20 mA)

Output level Low <0.5 V (I = 20 mA)

Load High / Low <20 mA

Absolute encoders - SSI

Shaft with clamping flange, stainless steel housing

Optical multiturn encoders 14 bit ST / 12 bit MT


GE404 - SSI

Terminal significance	
UB	Encoder voltage supply.
GND	Encoder ground connection relating to UB.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SS clock input. Clock+ together with clock- forms a current loop. A current of approx. 7 mA towards clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with clock+ forms a current loop. A current of approx. 7 mA towards clock- input means logic 0 in positive logic.
Zero setting	Input for setting a zero point anywhere within the programmed encoder resolution. The zero setting operation is triggered by a High impulse and has to be in line with the selected direction of rotation (UP/DOWN). Connect to GND after setting operation for maximum interference immunity. Impulse duration ≥ 100 ms.
DATAVALID	Diagnostic output. An error warning is given at level Low. Important: Interferences must be drained by the downstream electronics.
DATAVALID MT	Diagnostic output for monitoring the multiturn sensor voltage supply. Upon dropping below a defined voltage level the DV MT output is switched to Low.
UP/DOWN	UP/DOWN counting direction input. This input is standard on High. UP/DOWN means ascending output data with clockwise shaft rotation when looking at flange. UP/DOWN-Low means ascending values with counterclockwise shaft rotation when looking at flange.
Incremental Outputs	Incremental tracks A 90° B and inverted.

Terminal assignment		
GE404		
Connector	Core colour	Assignment
Pin 1	brown	UB
Pin 2	black	GND
Pin 3	blue	Clock+
Pin 4	beige	Data+
Pin 5	green	Zero setting
Pin 6	yellow	Data-
Pin 7	violet	Clock-
Pin 8	brown/yellow	DATAVALID
Pin 9	pink	UP/DOWN
Pin 10	black/yellow	DATAVALID MT
Pin 11	–	–
Pin 12	–	–

GE404 with incremental tracks

Connector	Core colour	Assignment
Pin 1	brown	UB
Pin 2	white	GND
Pin 3	blue	Clock+
Pin 4	green	Data+
Pin 5	grey	Zero setting
Pin 6	yellow	Data-
Pin 7	red	Clock-
Pin 8	red/blue	Track B inv.
Pin 9	pink	UP/DOWN
Pin 10	violet	Track a inv.
Pin 11	black	Track A
Pin 12	grey/pink	Track B



Please use cores twisted in pairs (for example clock+ / clock-) for extension cables of more than 10 m length.

Optical multiturn encoders 14 bit ST / 12 bit MT