

# Inclination sensors

1-dimensional, measuring range 0...360°

Analog

## GIM140R - 1-dimensional, analog



GIM140R

### Features

- Size 48 mm
- Interface Analog
- MEMS capacitive measuring principle
- Measuring range 1-dimensional: 0...360°
- Aluminium housing
- Protection IP 67/IP 69K
- Connection cable
- Teach input for adjustment of zero position

### Optional

- Analog output with out-of-range diagnostic

### Technical data - electrical ratings

Voltage supply	8...30 VDC 12...30 VDC
Reverse polarity protection	Yes
Short-circuit proof	Yes
Consumption typ.	8 mA (24 VDC, w/o load, voltage output) 12 mA (w/o load, current output)
Interface	Analog (4...20 mA / 0.5...4.5 V / 0...10 V)
Load resistor	Between Out/0 V ≥3 kΩ / voltage output 270 Ω at 10 VDC (500 Ω at 15 VDC) / current output
Measuring range	0...30°, 0...60°, 0...90°, 0...120°, 0...180°, 0...270°, 0...360°
Resolution	0.2 °
Accuracy (+25 °C)	±0.4 °
Sensing method	MEMS technology
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Programmable parameters	Preset
Diagnostic function	Out-of-range diagnostics

### Technical data - mechanical design

Dimensions W x H x L	48 x 14 x 45 mm
Protection DIN EN 60529	IP 67/IP 69K
Material	Housing: aluminium, anodised
Corrosion protection	ISO 9227:2017 salt mist according to ISO 12944-6:1998 C5-M (CX)
Operating temperature	-40...+85 °C
Resistance	DIN EN 60068-2-6 Vibration 10 g, 10-2000 Hz DIN EN 60068-2-27 Shock 50 g, 11 ms
Weight approx.	50 g
Connection	Cable 0.3 m, radial

**Inclination sensors**  
**1-dimensional, measuring range 0...360°**  
**Analog**

**GIM140R - 1-dimensional, analog**

**Part number**

GIM140R- **M** **1** . **K** .**A**

Option

Without option

/4822 Output signal with out-of-range diagnostics

Voltage supply / interface

V3 8...30 VDC / Analog 0.5...4.5 VDC

V6 12...30 VDC / Analog 0...10 VDC

C0 12...30 VDC / Analog 4...20 mA

Connection

K Cable 0.3 m, Standard 5x0.5 mm<sup>2</sup>

Measuring range

030 0...30°

060 0...60°

090 0...90°

120 0...120°

180 0...180°

270 0...270°

360 0...360°

Number of axes

1 1-dimensional

Housing

M Metal


# Inclination sensors

1-dimensional, measuring range 0...360°

Analog


## GIM140R - 1-dimensional, analog

### Installation position

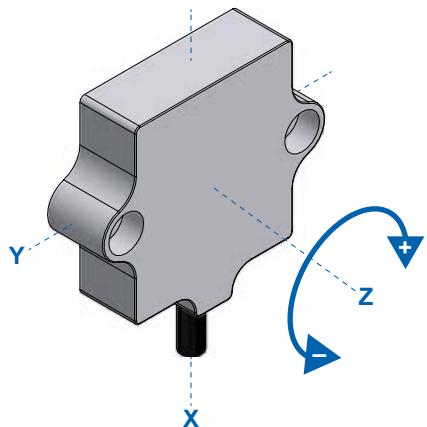

The 1-dimensional inclination sensor must be installed with its x-axis in line with the force of gravity, as illustrated below.

The 1-dimensional sensor default position is 0° as shown in the following illustration.

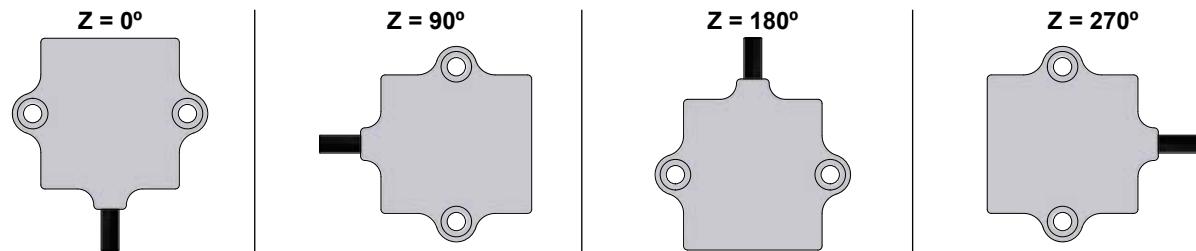

### Terminal assignment

#### Cable

Core color	Signal	Description
White	0 V	Ground relating to +Vs
Brown	+Vs	Voltage supply
Green	Out	Output
Yellow	n.c.	Do not use
Grey	Teach	Teach-input

Cable data: 5 x 0.5 mm<sup>2</sup>

### Teach process

The teach-in function enables rapid and easy commissioning in the field.

#### Setting zero:

- » Get inclinometer on position intended for zero position.
- » Set teach input for 5 < t < 10 seconds on high level.

#### Teach-input signal level

High level: >2.1 V

Low level: <1 V

Maximum: +Vs

# Inclination sensors

## 1-dimensional, measuring range 0...360°


### Analog

#### GIM140R - 1-dimensional, analog


##### Output signals

Analog output


Measuring range 0...90°

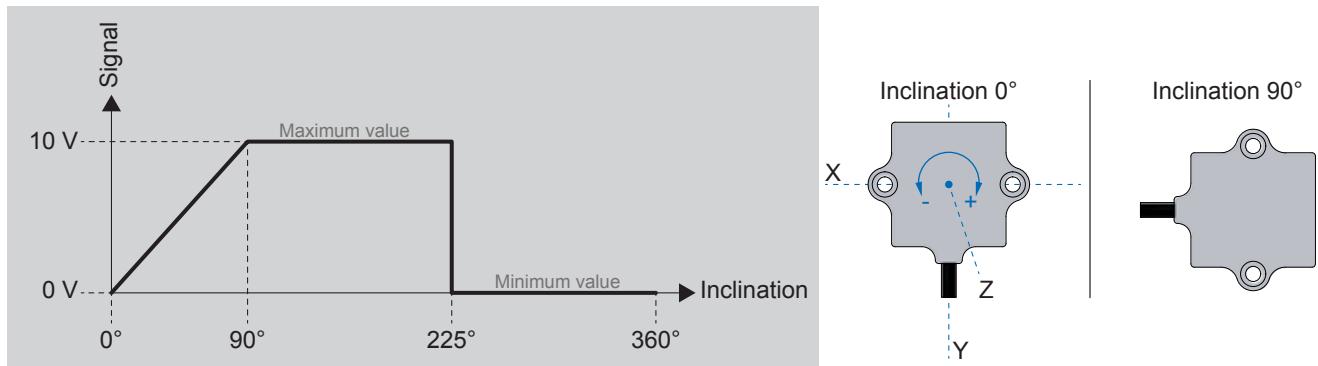

Measuring range 0...180°

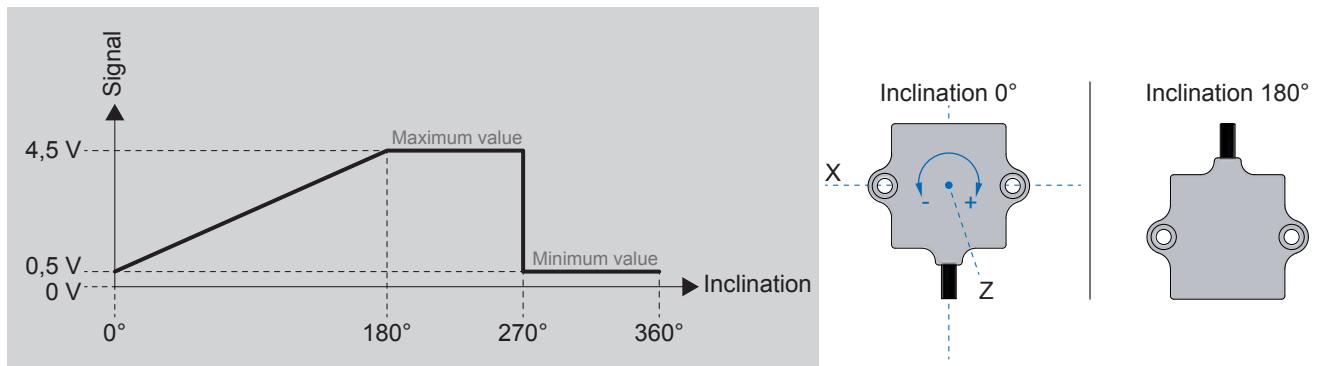

Measuring range 0...270°

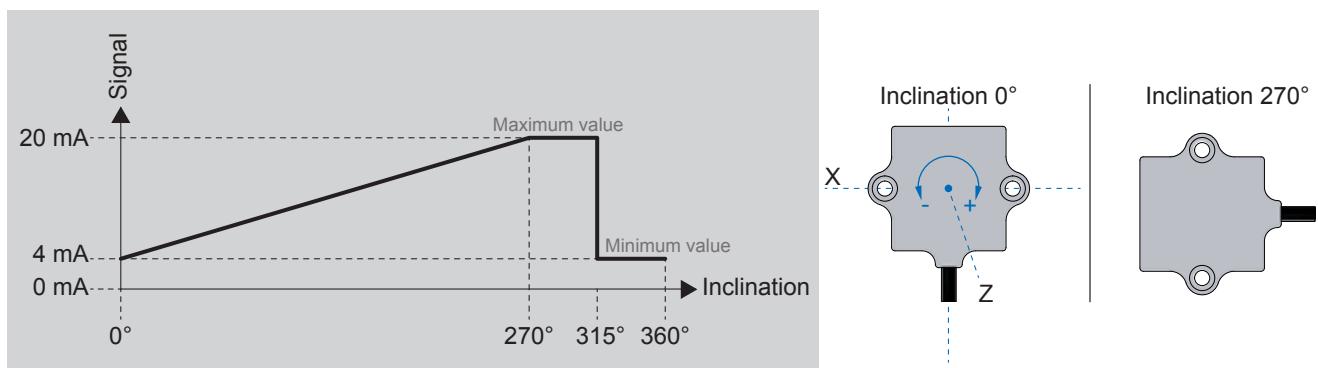

# Inclination sensors

1-dimensional, measuring range 0...360°


Analog

## GIM140R - 1-dimensional, analog


### Output signals

Analog output with out-of-range diagnostic


Measuring range 0...90°

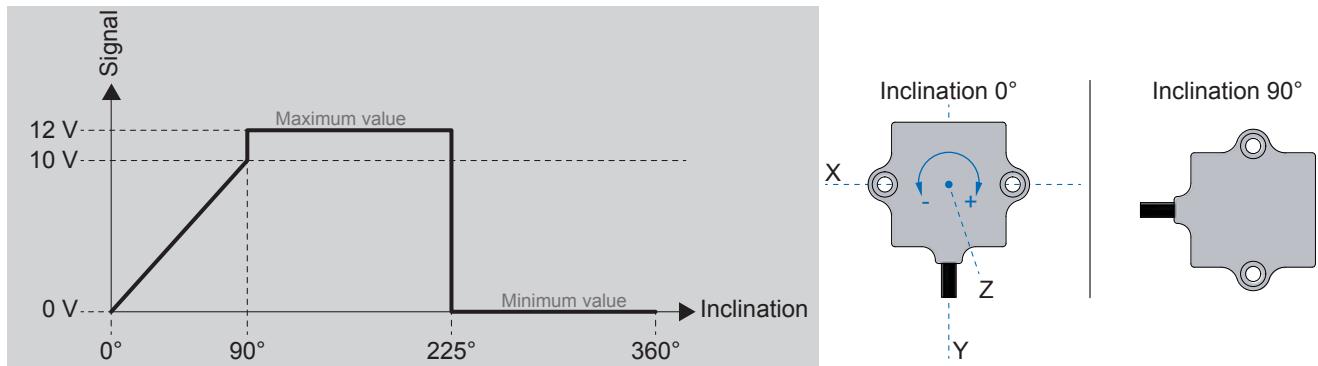

Measuring range 0...180°

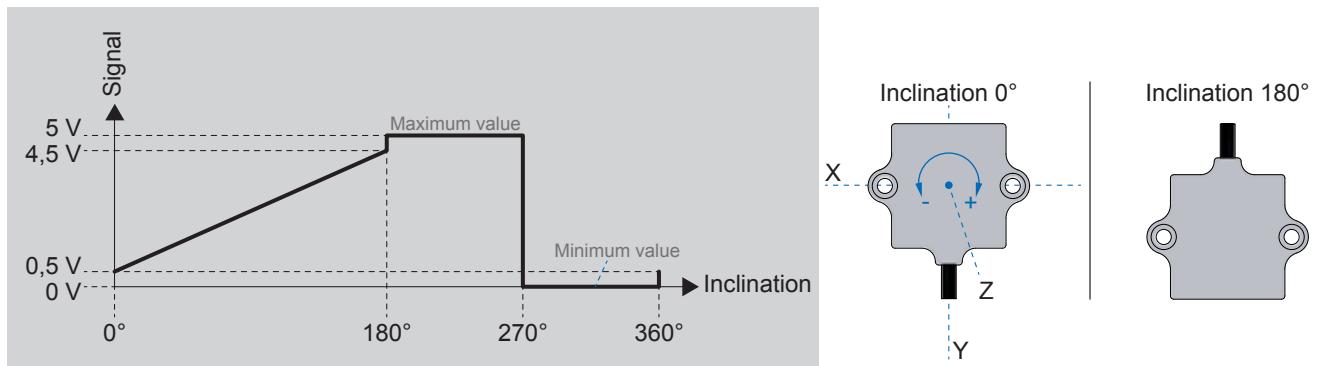

Measuring range 0...270°

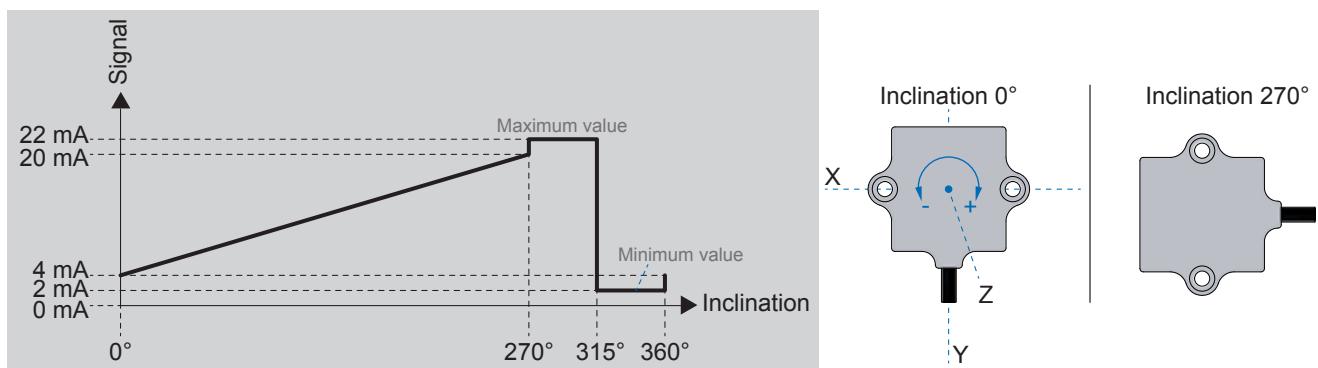

**Inclination sensors**  
1-dimensional, measuring range 0...360°  
Analog

**GIM140R - 1-dimensional, analog**

**Dimensions**

